


- Deep pleat separated HEPA filter

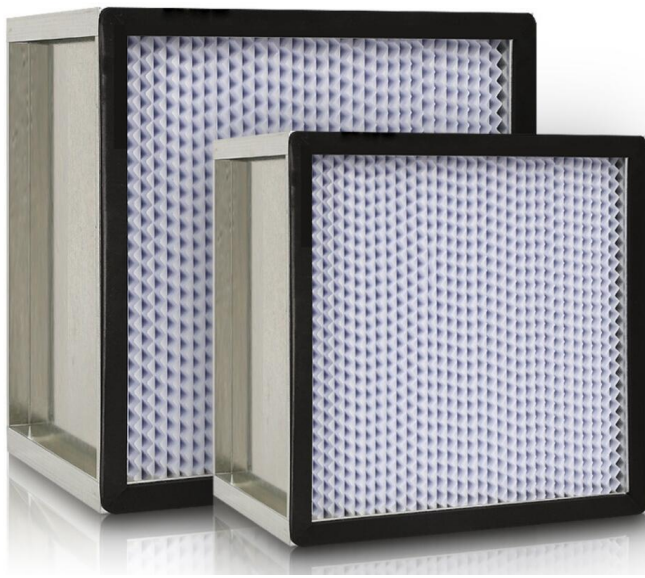

Specifications	
Efficiency	H13, H14 EN:1822
Filter media	Glassfiber
Frame	SUS, Gal, Wooden
Seal	Polyurethane
Gasket	EVA or urethane seamless
Size	Standard & customized
Humidity	80%
MAX temp	80°C
Final pressure drop	600Pa
Construction	DTF, Boxed, Flanged
Faceguard	Optional

-Parameters

Size	Airflow rate	Efficiency / Pressure drop	Efficiency / Pressure drop
305*305*150mm	250m ³ /h	H13 / 220Pa	H14 / 230Pa
305*610*150mm	500m ³ /h	H13 / 220Pa	H14 / 230Pa
610*610*150mm	1000m ³ /h	H13 / 220Pa	H14 / 230Pa
610*762*150mm	1250m ³ /h	H13 / 220Pa	H14 / 230Pa
610*915*150mm	1500m ³ /h	H13 / 220Pa	H14 / 230Pa
610*1220*150mm	2000m ³ /h	H13 / 220Pa	H14 / 230Pa
305*305*292mm	500m ³ /h	H13 / 220Pa	H14 / 230Pa
305*610*292mm	1000m ³ /h	H13 / 220Pa	H14 / 230Pa
610*610*292mm	2000m ³ /h	H13 / 220Pa	H14 / 230Pa
610*762*292mm	2500m ³ /h	H13 / 220Pa	H14 / 230Pa
610*915*292mm	3000m ³ /h	H13 / 220Pa	H14 / 230Pa
610*1220*292mm	4000m ³ /h	H13 / 220Pa	H14 / 230Pa

* For both standard and customized sizes, efficiency available

-Constructions



Box design




Double turn DTF



Single flanged

-Details

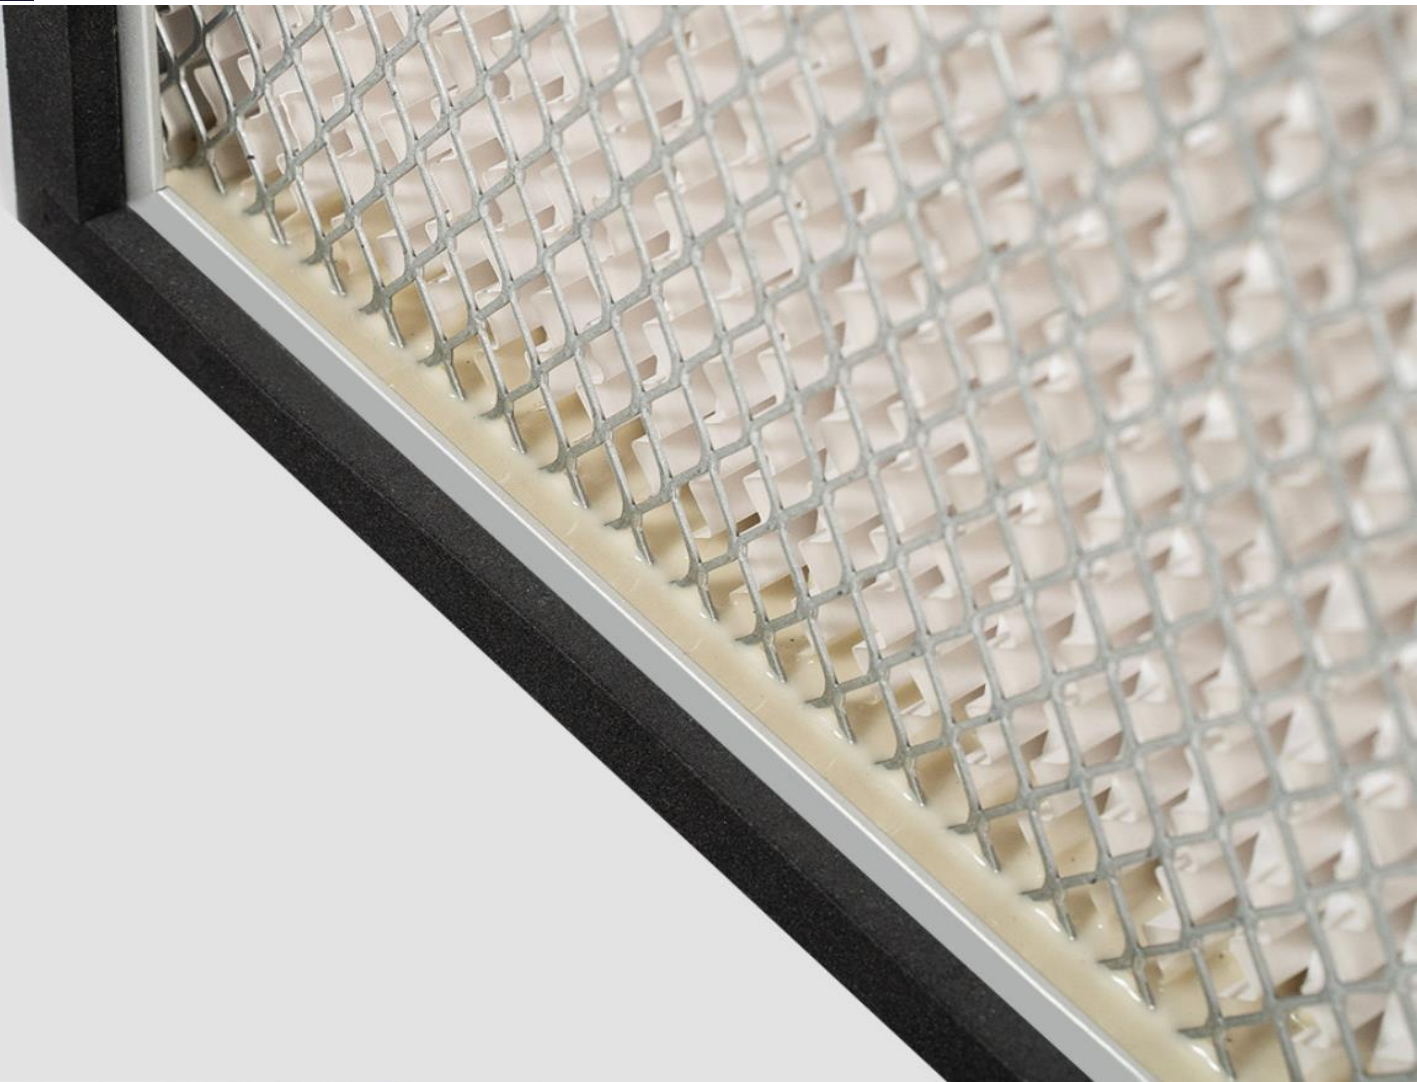

CHANGSHA EAWAYFILTER EQUIPMENT CO.,LTD

Website: www.cleanroom-ffu.com

Email: sales@cleanroom-ffu.com

Mob: 0086-13631590514

Whatsapp: 0086-13631590514

Add: 9th Building, Jianshan Road, Changsha, Hunan, China