




Front view

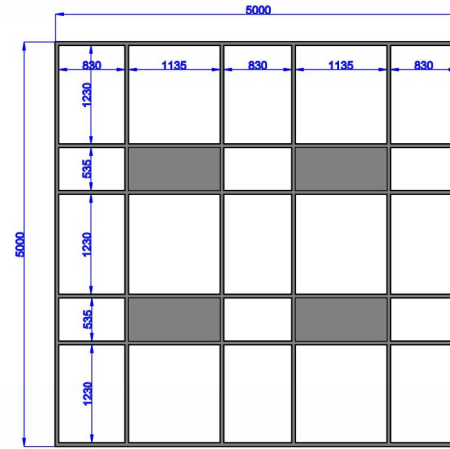

Top view

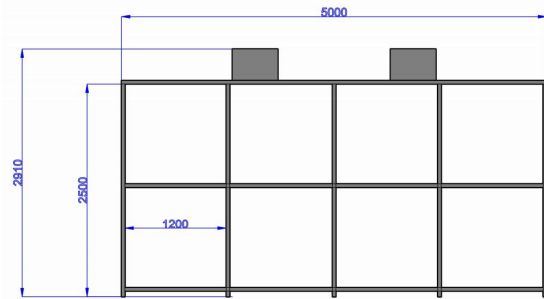

Side view

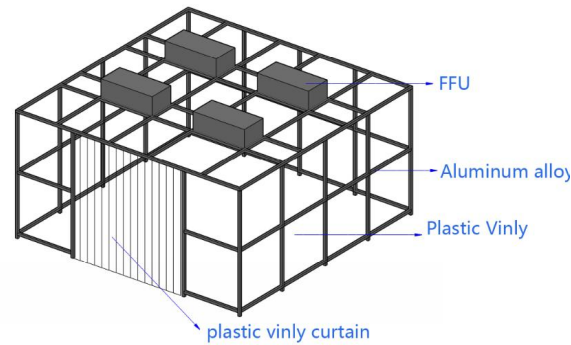

3D

Softwall cleanroom specification	
Cleanliness	Class 10,000
External dimension (L*W*H)	5000*5000*2910mm
Inner dimension (L*W*H)	4920*4920*2500mm
Power supply	AC, 220V/50Hz
Max total power consumption (W)	800W
Construction	Aluminum tube 40*40mm Plastic vinyl wall and door FFU *4 pcs on the top
FFU	External dimension (L*W*H) 1175*575*370mm HEPA filter (L*W*H) 1170*570*69mm Efficiency: 99.97% @ 0.3um Air velocity 0.45m/s Air flow rate: 1000m ³ /h Power consumption (W) 200 Cabinet material: stainless 201

Design by		Ai xian guo	
Date		23th Jan 2020	
Drawing No		1	
Changsha EawayFilter Equipment Co., Ltd			
No	Description	Quantity	Specification
1	FFU	4	1175*575*370mm
2	Control box	1	Control FFU and lamps
3	Plastic vinyl wall	3 rolls	1.37*30m T1mm
4	Plastic vinyl door	2 rolls	30m*16cm T2mm
5	Sockets	4	
6	Aluminum alloy tube		40*40*5000mm*2PCS 40*40*4920mm*6PCS 40*40*830mm*12PCS
7	Aluminum alloy tube Food cup	16pcs	
8	Lamp	2	LED light